

UVC-211B19P-C

2MP Full Color Fixed Bullet HD Camera

FULL
COLOR

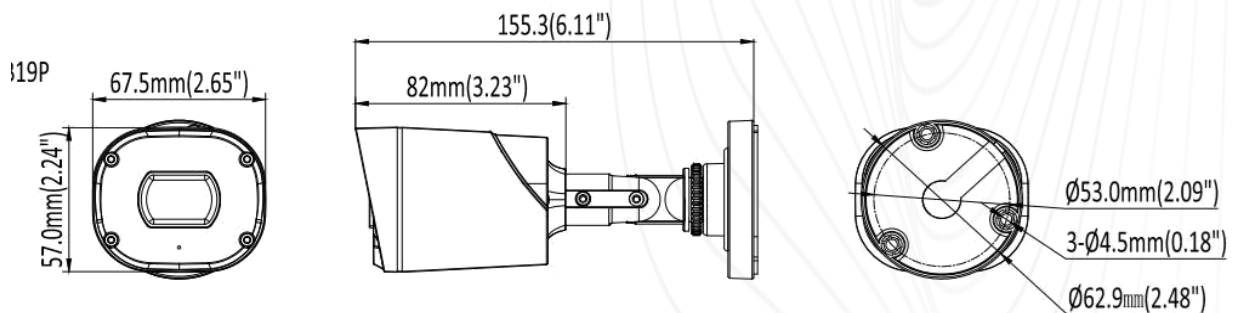
With its advanced image processing algorithm and capability to absorb substantial amounts of light, this camera helps users protect people and property by capturing high-quality, full-color imaging 24/7 with the same sharp rendering at night time as in daylight.



Key Features

- High quality imaging with 2 MP, 1920×1080 resolution
- 24/7 color imaging
- 3.6 mm Fixed focal lens
- Up to 25 m white light distance for bright night imaging
- D-WDR, 2D/3D DNR
- One port for four switchable signals (TVI/AHD/CVI/CVBS)
- Water and dust resistant (IP66)

Dimensions



Specification

Camera

Image Sensor	1/3" CMOS Sensor
Signal System	PAL/NTSC
Effective Pixels	1920 (H) x 1080(V)
Electronic Shutter	AUTO/ 1/50 (1/60) ~ 1/50,000sec
Min. Illumination	0.01Lux @(F1.2, AGC ON) , 0Lux with IR
Video Frame Rate	PAL/NTSC: 25/30fps
Video Output	AHD/TVI/CVI/CVBS

Camera Features

S/N Ratio	≥ 50dB
Noise Reduction	3D DNR
Day & Night	Full Color
White Balance	ATW/Manual
WDR	D-WDR
Illuminator Number	1pcs Warm Light
Illumination Distance	25m

Lens



Focal Length	3.6mm Fixed Lens
Angle of View	3.6 mm: Horizontal FOV: 82°, Vertical FOV: 45°, Diagonal FOV: 94°
Lens Type	Fixed Iris
Mount Type	M12

General

IP Rating	IP66
Housing Material	Plastic
Power Supply	DC12V (±10%)
Power Consumption	<5W
Working Temperature / Humidity	-20 ~ +60°C, RH95% MAX
Dimensions(W×D×H)	Φ 155.3 × 67.5 × 57 mm (6.11" × 2.65" × 2.24")
Weight	117 g (0.25 lb)



Related Accessories

LB10	LB10B	LB01B	LB02
Junction Box, $\Phi 112.5 \times 49.5$ MM	Junction Box, $\Phi 112.5 \times 50.4$ MM	Junction Box, $145.2 \times 145.2 \times 53.5$ MM	Junction Box, non-waterproof, $\Phi 103.3 \times 37.8$ MM
 	 		

PM03
Pole Mount, $\Phi 170 \times 135.8 \times 43.7$ MM


Please select accessories according to the installation scenario:

