

UVC-511B19M-MC

5MP Full Color Fixed Bullet HD Camera

FULL
COLOR


With its advanced image processing algorithm and capability to absorb substantial amounts of light, this camera helps users protect people and property by capturing high-quality, full-color imaging 24/7 with the same sharp rendering at night time as in daylight.



Key Features

- High quality imaging with 5MP, 2592 × 1944 resolution
- 24/7 color imaging
- 3.6 mm Fixed focal lens
- Up to 30 m white light distance for bright night imaging
- D-WDR , 2D DNR
- One port for four switchable signals (TVI/AHD/CVI/CVBS)
- High quality audio with audio over coaxial cable, built-in mic

Dimensions

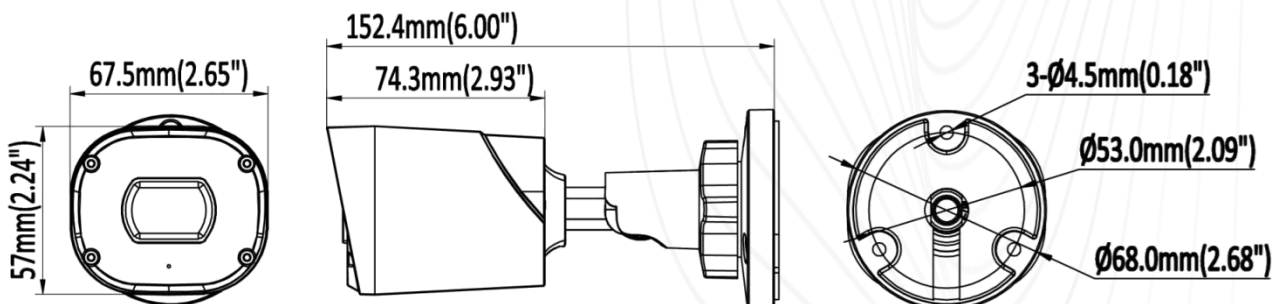

Specification

Camera

Image Sensor	1/3" CMOS Sensor
Signal System	PAL/NTSC
Effective Pixels	2592 x 1944
Electronic Shutter	AUTO/ 1/50 (1/60) -1/50,000sec
Min. Illumination	0.005Lux @(F1.6, AGC ON) , 0LUX with Warm Light
Video Frame Rate	PAL/NTSC: 5MP @20fps
Video Output	AHD/TVI/CVI/CVBS
Mic	Support (Only in TVI mode)
Alarm	N/A

Camera Features

S/N Ratio	≥ 50db
Noise Reduction	2D DNR
Day & Night	Full Color
White Balance	ATW/MWB
WDR	D-WDR
Illuminator Number	1pcs warm light
Illumination Distance	30M (warm light)

Lens

Focal Length	3.6mm F1.6 Fixed Lens
Angle of View	3.6mm: Horizontal FOV:80 ,Vertical FOV: 42, Diagonal FOV: 90
Lens Type	Fixed Iris
Mount Type	M12


General

IP Rating	IP66
Housing Material	Metal
Power Supply	DC12V (±10%)
Power Consumption	<5W
Working Temperature/Humidity	-30 ~ +60°C, RH95% MAX



Dimensions(W×D×H)	Φ 68 × 152.4 mm (2.68" × 6")
Weight	320 g (0.70 lb)

Related Accessories

LB10	LB10B	LB01B	LB02
Junction Box, Φ112.5 × 49.5 MM	Junction Box, Φ112.5 × 50.4 MM	Junction Box, 145.2 × 145.2 × 53.5 MM	Junction Box, non- waterproof , Φ103.3 × 37.8MM
			

PM03

Pole Mount , Φ170 × 135.8
×43.7 MM



Please select accessories according to the installation scenario:

