UVC-532C59M-M

5MP Varifocal Bullet HD Camera




The Value Series UVCs offer simple and highly cost -effective HD solutions, meeting the requirement of 24/7 reliable monitoring with high-quality image performance, and saving budget for customers on both devices and labor. Its structural flexibility and high cost-performance makes the camera an ideal choice for SMB solutions.



Key Features

- High quality imaging with 5MP, 2592 × 1944 resolution
- 3.3 ~ 12 mm Varifocal
- Up to 50 m IR distance
- D-WDR, 2D DNR
- One port for four switchable signals (TVI/AHD/CVI/CVBS)
- Water and dust resistant (IP67)

Dimensions

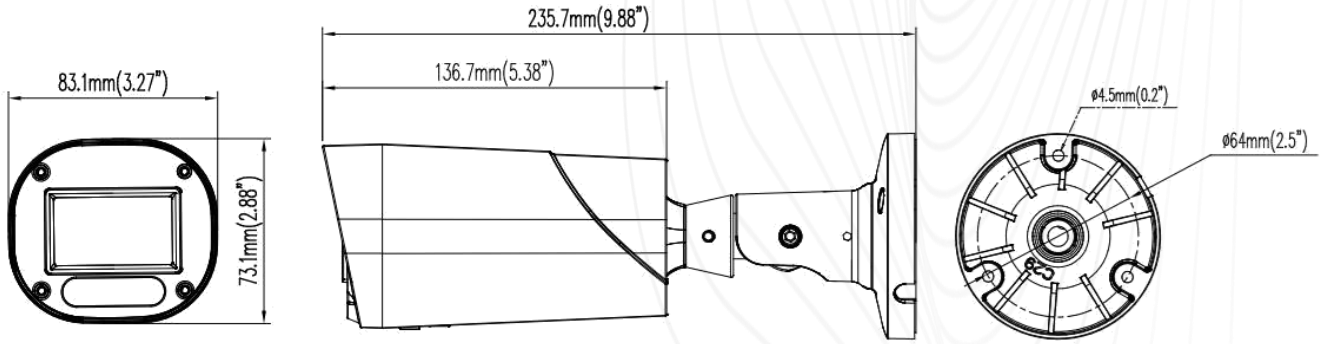


Specification

Camera	
Image Sensor	1/2.7" CMOS Sensor
Signal System	PAL/NTSC
Effective Pixels	2592 (H) × 1944 (V)
Electronic Shutter	AUTO/ 1/50 (1/60) ~ 1/50,000sec
Min. Illumination	0.01Lux @(F1.2, AGC ON) , 0LUX with IR
Video Frame Rate	PAL/NTSC: 5MP @20fps
Video Output	AHD/TVI/CVI/CVBS
Mic	Support (only in TVI mode)
Camera Features	
S/N Ratio	≥ 50dB
Noise Reduction	2D DNR
Day & Night	Auto/Color/B&W
White Balance	ATW/MWB
WDR	D-WDR
Illuminator Number	3 (IR light)
Illumination Distance	50m (IR)
Lens	
Focal Length	3.3 ~ 12 mm Manual Zoom Lens
Angle of View	Horizontal: 93° ~ 46°
Lens Type	Fixed Iris
Mount Type	Φ 14
General	
IP Rating	IP67
Housing Material	Metal
Power Supply	DC12V (±10%)
Power Consumption	< 12W
Working Temperature/Humidity	-40 ~ +60℃, RH95% MAX
Dimensions (W × D × H)	Φ 235 × 83 × 72.7mm (9.88" × 3.27")
Weight	700 g (1.54 lb)

داتیس
ضمانت خرید شماست

Related Accessories

LB10	LB01B	LB02	PM03
Junction Box,Φ112.5 × 49.5 MM	Junction Box, 145.2 × 145.2 × 53.5 MM	Junction Box,non-waterproof , Φ103.3 × 37.8MM	Pole Mount , Φ170 × 135.8 ×43.7 MM
			

Please select accessories according to the installation scenario:

