

UVC-532U9EM-M

5MP Varifocal Turret HD Camera



The Value Series UVCs offer simple and highly cost-effective HD solutions, meeting the requirement of 24/7 reliable monitoring with high-quality image performance, and saving budget for customers on both devices and labor. Its structural flexibility and high cost-performance makes the camera an ideal choice for SMB solutions.

Key Features

- High quality imaging with 5MP, 2592 × 1944 resolution
- 3.3 ~ 12 mm Varifocal
- Up to 60 m IR distance
- D-WDR, 2D DNR
- One port for four switchable signals (TVI/AHD/CVI/CVBS)
- Water and dust resistant (IP67)



Dimensions

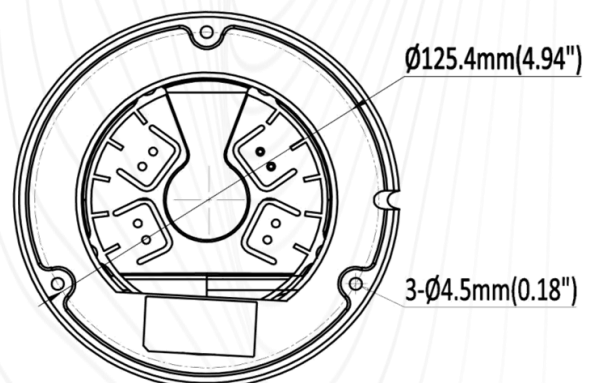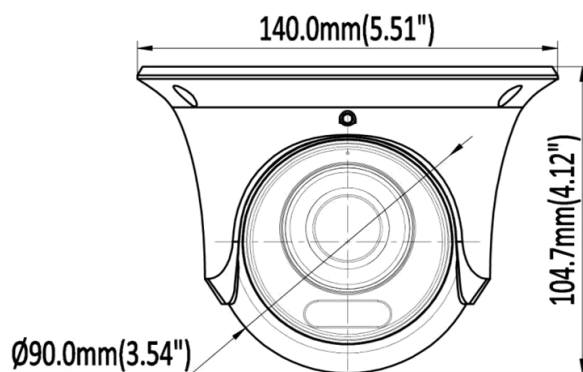

Specification

Camera

Image Sensor	1/2.7" CMOS Sensor
Signal System	PAL/NTSC
Effective Pixels	2592 (H) × 1944 (V)
Electronic Shutter	AUTO/ 1/50 (1/60) ~ 1/50,000sec
Min. Illumination	0.01Lux @ (F1.2, AGC ON) , 0LUX with IR
Video Frame Rate	PAL/NTSC:5MP @20fps
Video Output	AHD/TVI/CVI/CVBS
Mic	Support (only in TVI mode)

Camera Features

S/N Ratio	≥50dB
Noise Reduction	2D DNR
Day & Night	EXT/Auto/Color/B & W
White Balance	ATW/Manual
WDR	D-WDR
IR LED	4pcs SMD LED
IR Range	60M

Lens

Focal Length	3.3 ~ 12 mm Manual Zoom Lens
Angle of View	Horizontal FOV: 102 ~ 38°, Vertical FOV: 56 ~ 22°, Diagonal FOV: 118 ~ 42°
Lens Type	Fixed Iris
Mount Type	Φ14

General

IP Rating	IP67
Housing Material	Metal
Power Supply	DC12V (±10%)
Power Consumption	< 12W
Working Temperature/Humidity	-40 ~ +60°C, RH95% MAX
Dimensions (W × D × H)	Φ 140 x 104.7 mm (5.51" x 4.12")
Weight	620 g (1.36 lb)



Related Accessories

LB01B	LB12C	LB07C	PM03	CM700
Junction Box, 145.2 × 145.2 × 53.5 MM	Junction Box, Φ 142 × 46.5 MM	Wall Mount , Φ136 × 120 × 208 MM	Pole Mount , Φ170 × 135.8 × 43.7 MM	Pendant Mount , Φ 116 × 734.5 MM
				

Please select accessories according to the installation scenario:

