IPC-714211C2C-TALZ

2MP Starlight Motorized Bullet Network Camera

STARlight




Based on Briton's advanced technologies, Value Series provides intelligent, simple and inclusive products and solutions.With Starlight technology, this series camera provides a better image effect in the condition of low illuminance.

IP67

Key Features

- High quality imaging with 2MP resolution
- Motorized varifocal lens for easy installation and monitoring
- Efficient H.265+ compression technology
- Clear imaging against strong backlight due to 120 dB WDR technology
- Focus on human targets classification
- Water and dust resistant (IP67)

Dimensions

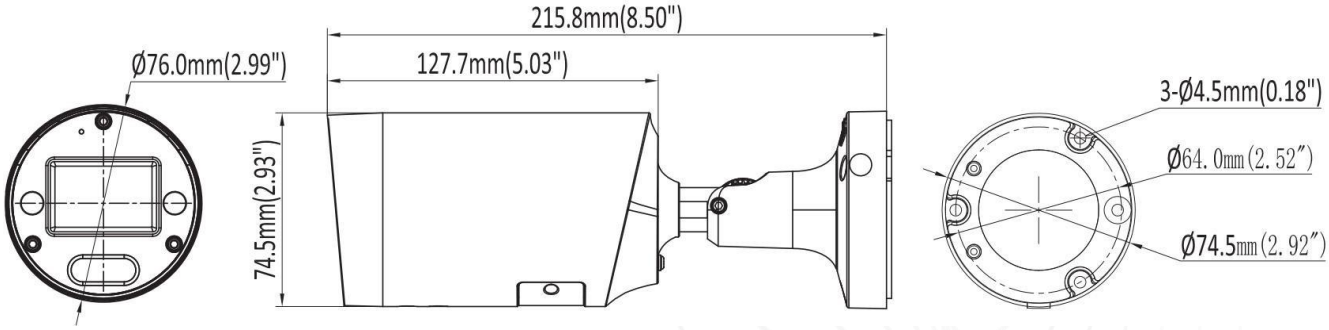

داتیس
ضمانت خرید شماست

Specification


Camera	
Image Sensor	1/2.8" Progressive scan CMOS Sensor
Min. Illumination	0.006 lux (Color) , 0 lux (IR on)
Illumination Number	4pcs (IR light)
Illumination Distance	70m (IR light)
Strobe Light	Support
Smart IR	Support
Lens	
Focal Length	2.7 ~ 13.5mm
FOV	Horizontal FOV: 100° ~ 40°, vertical FOV:53° ~ 22°, diagonal FOV: 115° ~ 47°
Compression Standard	
Video Compression	H.264/H.265/H.264+/H.265+
H.264 Codec Profile	Base/Main/High profile
H.265 Codec Profile	Main profile
Video Bit Rate	11 Kbps ~ 8Mbps
Audio Compression	G.711A, G.711U
Audio Bit Rate	64 Kbps
Image	
Max. Image Resolution	1920 × 1080
Main Stream	50Hz: 25fps 1080P (1920 × 1080) 25fps 960P (1280 × 960) ,25fps 720P (1280 × 720) 60Hz: 30fps 1080P (1920 × 1080) 30fps 960P (1280 × 960), 30fps 720P (1280 × 720)
Sub Stream	50Hz: 25fps D1 (704 × 576) ,25fps CIF (352 × 288) 60Hz: 30fps D1 (704 × 480) ,30fps CIF (352 × 240)
Third Stream	50Hz: 25fps CIF (352 × 288) 60Hz: 30fps CIF (352 × 240)
Image Setting	Brightness/Contrast/Saturation/Hue/Sharpness
Shutter Time	Auto/Manual, 1/3 ~ 1/10000s
Day/Night	IR cut filter with auto switch
Wide Dynamic Range	DWDR/WDR
Digital Noise Reduction	2D/3D DNR
BLC	Support

داتیس
ضمانت خرید شماست

HLC	Support
ROI	Support
Rotate	Support
Smart Feature	
Basic Event	Motion detection, video tampering
Smart Event	Smart motion detection, line crossing, area intrusion, region entrance, region exiting, fast moving
Network	
Network Storage	N/A
Protocols	TCP/IP, ICMP, HTTP, HTTPS, FTP, DHCP, DNS, DDNS, RTP, RTSP, RTCP, NTP, IGMP, UPnP, SMTP, UPnP-TM, P2P, Bonjour, IPV6
System Compatibility	Onvif (Profile S), CGI
Security	User authentication,IP address filtering,Video mask
Web Browsers	IE, Edge, Chrome, Firefox
Mobile Surveillance	iPhone, Android
Interface	
Communication interface	1 RJ45 10M/100M Ethernet Port
On-board storage	Up to 128GB
Audio I/O	1/1
Alarm I/O	N/A
Reset button	Support
General	
Operating Conditions	-30°C ~ 60°C (-22°F ~ 140°F) Humidity 95% or less (non-condensing)
Power Supply	DC12V ± 10%
POE	PoE (802.3 af)
Power Consumption	MAX. 10 W
Protection Level	IP67
Vandalproof	N/A
Material	Metal
Dimensions	Φ 76 × 215.8 mm (Φ 2.99" × 8.50")
Gross Weight	890 g (1.92 lb)

داتیس
ضمانت خرید شماست

Related Accessories

LB10	LB01B	LB02	PM03
Junction Box,Φ112.5 × 49.5 MM	Junction Box, 145.2 × 145.2 × 53.5 MM	Junction Box,non-waterproof , Φ103.3 × 37.8MM	Pole Mount , Φ170 × 135.8 ×43.7 MM
			

Please select accessories according to the installation scenario:

